




Milesight-Troubleshooting Motion Detection on NUUO NVR

Camera Version	xx.5.0.99	NVR Version	V2.1.5
-----------------------	------------------	--------------------	---------------


The Network Video Recorders of NUUO support motion detection itself. By a few steps of configuration on the NVR you can have a better experience on Milesight IP Cameras.

1. Enable Motion Function on the NVR

Step1: On the Live View screen, click Menu list button  → Main Menu button  → Camera button  → Camera Settings button → Motion(NVR)tab.

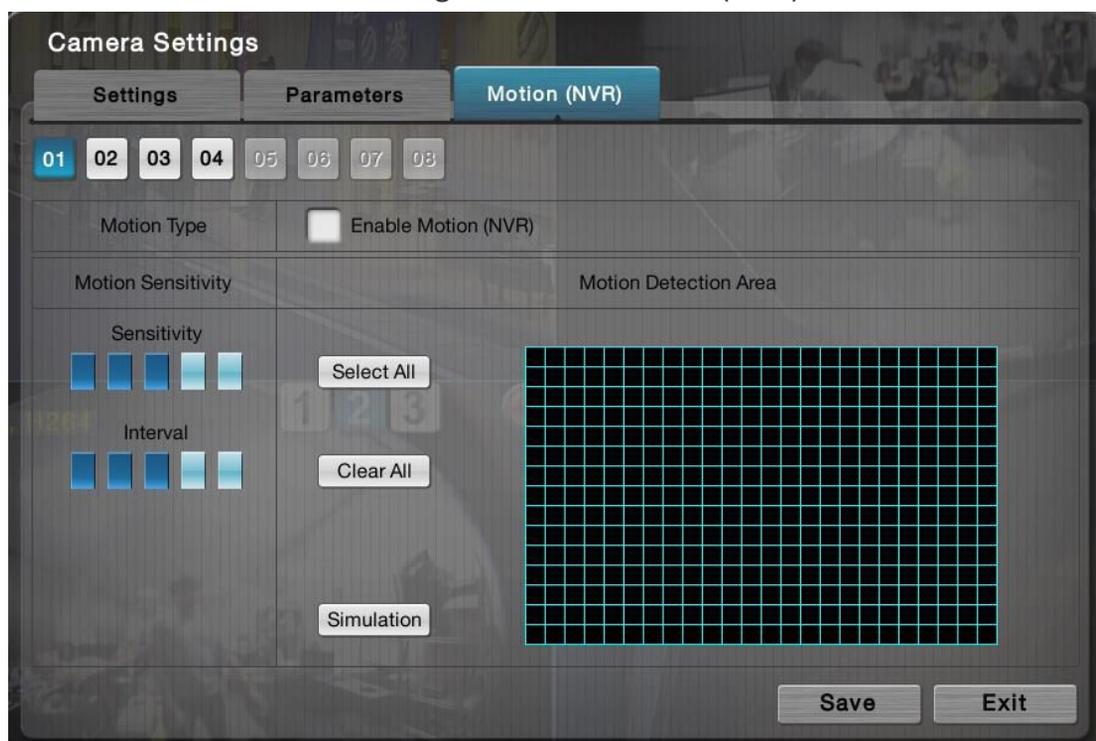


Step2: Check the “Enable Motion(NVR)” box, and video from the camera will appear. Then set up motion detection’s sensitivity, interval, and detection area.

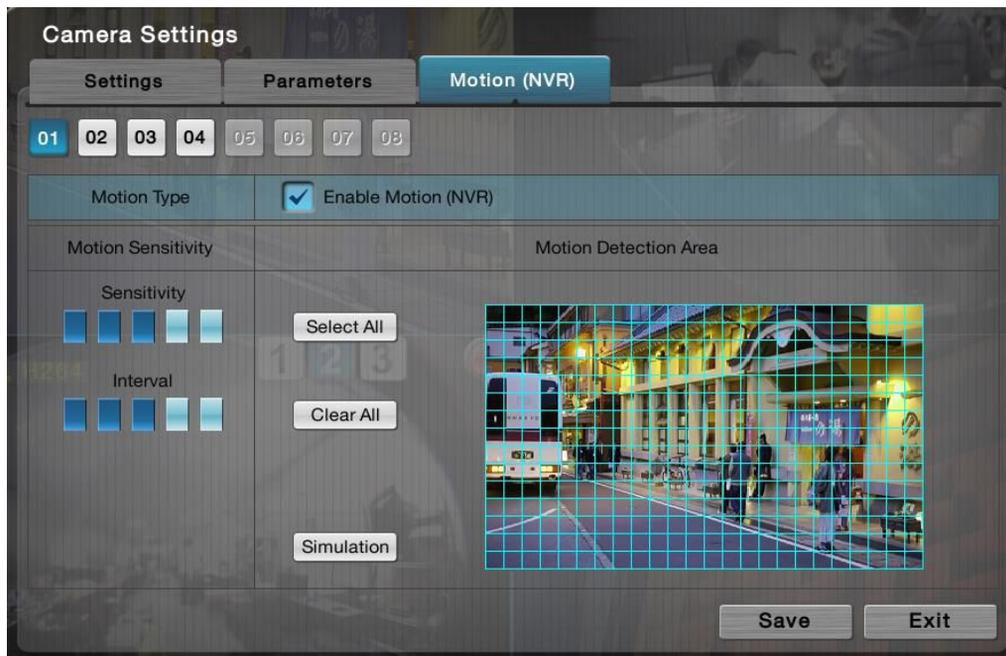

2. Recording Triggered by Motion Detection

Step1: On the Live View screen, click Menu list button  → Main Menu button  → Recording & Event button  → Recording Settings button → Mode tab. And choose “Recorded by schedule”.

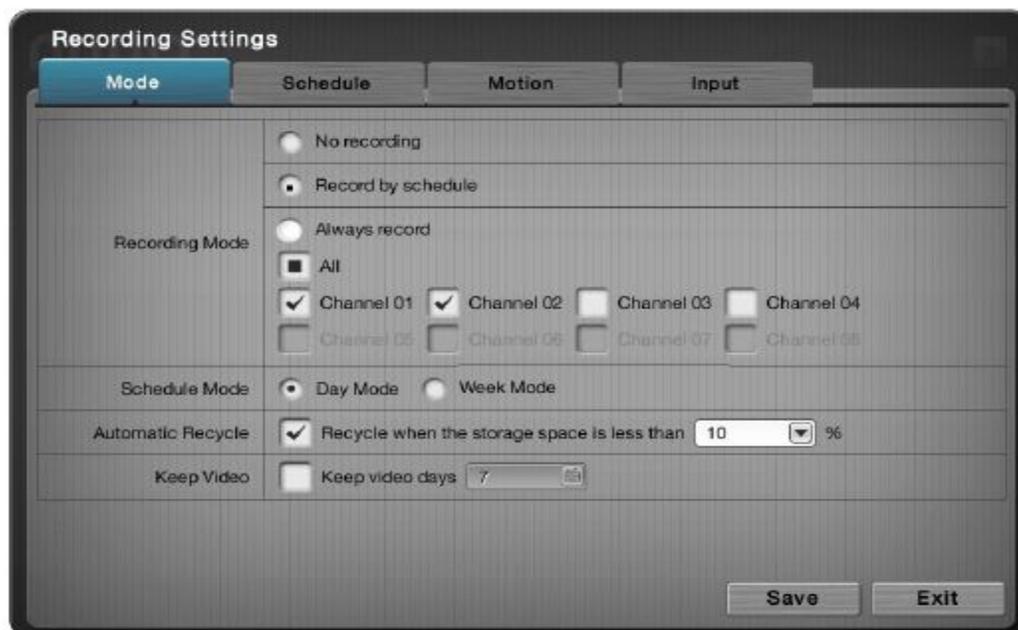


Step2: On the Live View screen, click Menu list button  → Main Menu button  → Recording & Event button  → Recording Settings button → Motion tab. Set the configuration you need.



Setting	Description	Default
01 02 03 04	Selects a camera channel to configure.	01
Pre-Record	Sets the time to start recording right before the event of video motion occurred.	15 sec.
Post-Record	Sets the time to keep recording after the video motion stops.	15 sec.
Camera	Defines which camera's motion detection to associate with this channel of camera to start recording.	--

Step3: On the Live View screen, click Menu list button → Main Menu button → Recording & Event button → Recording Settings button > Schedule tab. Click the “Motion button” and mark a time slot to record video upon the detection of video motion.

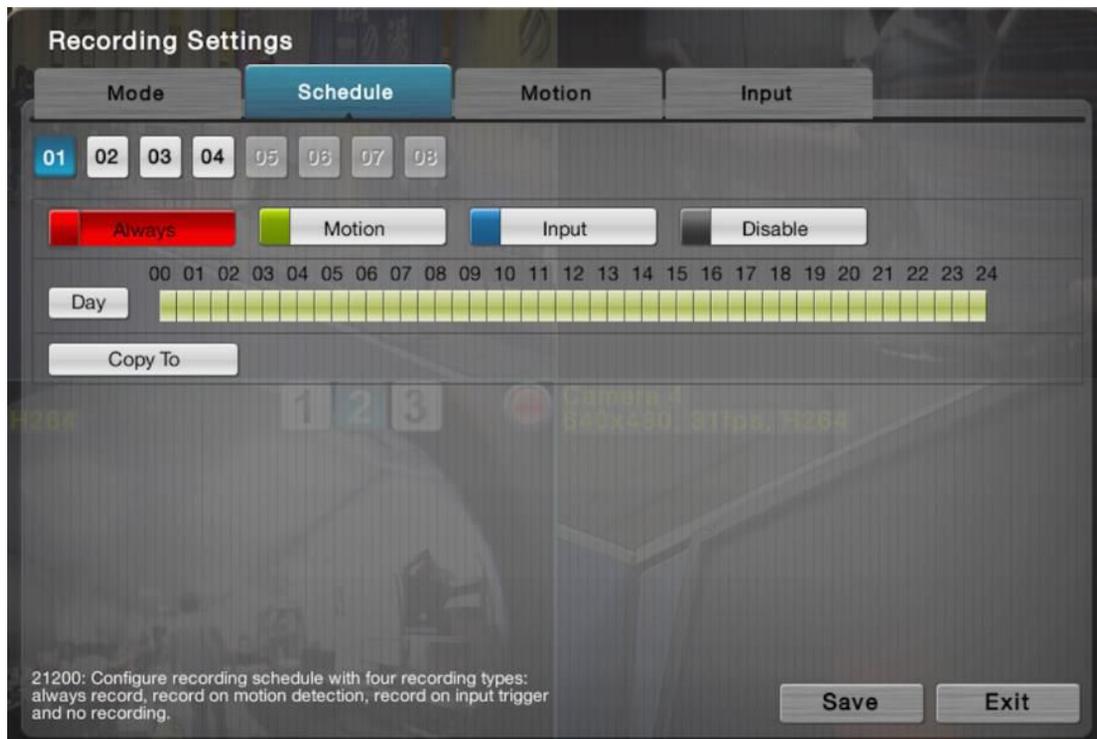

Note:

If it's been set successfully, you will see a icon  in the right-upper corner of the live view division of the camera.

3. Other Actions Triggered by Motion Detection

Besides recording video triggered by motion, there are other actions that can be set as the response to the motion alarm.

Step1: On the Live View screen, click Menu list button  →Main Menu button  →Recording & Event button  →Event & Action button →Camera tab.



Step2: Check the “Motion from camera” box and edit the schedule and actions, which including “Output”, “Email”, “Push Notification” and so on. Then you will see the corresponding actions when motion alarm is triggered.